# Avocent® ACS 6000 Advanced Console Server

*Command Reference Guide*

EMERSON
Network Power

**For important safety information, visit:**
**www.emersonnetworkpower.com/ComplianceRegulatoryInfo**

Emerson, Emerson Network Power and the Emerson Network Power logo are trademarks or service marks of Emerson Electric Co. Avocent, the Avocent logo and Cyclades are trademarks or service marks of Avocent Corporation or its affiliates in the U.S. and other countries. Liebert is a trademark and service mark of Liebert Corporation. All other marks are the property of their respective owners. This document may contain confidential and/or proprietary information of Avocent Corporation, and its receipt or possession does not convey any right to reproduce, disclose its contents, or to manufacture or sell anything that it may describe. Reproduction, disclosure, or use without specific authorization from Avocent Corporation is strictly prohibited. ©2014 Avocent Corporation. All rights reserved.

**NOTE:** This document supports versions up to and including release 3.0

# TABLE OF CONTENTS

**Introduction, Navigation and Commands** ..... **1**
Access Options and How to Log Into the CLI ..... 2
Configuration Tasks Performed With the CLI ..... 3
CLI Navigation ..... 3
Autocompletion ..... 5
Parameters ..... 5
Command Line Syntax ..... 6
**CLI Command Set** ..... **9**
Commands Used for the CLI ..... 9
help ..... 9
add ..... 10
delete ..... 10
cd ..... 10
pwd ..... 11
connect ..... 11
sniff ..... 12
share ..... 12
disconnect ..... 13
exit/quit ..... 13
ftp ..... 13
scp ..... 13
set ..... 14
commit ..... 14
revert ..... 14
ls ..... 15
show ..... 15
list_configuration ..... 15
cycle, on, off, lock and unlock ..... 16
passwd ..... 17
opiepasswd ..... 17
wiz ..... 18
Special Multi-session Commands ..... 18
list_shared_session ..... 19
kill_shared_session ..... 19
sendmsg ..... 19
show_databuf and show_appliance_databuf ..... 19
cleandbuf and clean_appliance_databuf ..... 20
CLI Equivalent Actions to Web Manager Checkbox Selection ..... 20
**Port Access and Configuration Examples** ..... **23**
View Information About the Console Server and Connected Devices ..... 23
Connect to a Device Console Connected to a Serial Port ..... 25

Accessing Serial Ports using ts_menu ..... 26
Manage Power for a Device Connected to an Outlet on a PDU ..... 27
Port Configuration Examples ..... 27
**CLI Overview for Administrators ..... 31**
System ..... 31
System/Security ..... 31
System/Date and Time ..... 32
System/Help and Language ..... 33
System/General ..... 33
System/Boot Configuration ..... 34
System/Information ..... 34
System/Usage ..... 35
Network ..... 35
Network/Settings ..... 35
Network/IPv4 and IPv6 ..... 36
Network/Devices ..... 36
Network/Hosts ..... 37
Network/Firewall ..... 39
Network/IPSec(VPN) ..... 39
Network/SNMP ..... 39
Wiz command ..... 40
Ports ..... 41
Auxiliary ports ..... 43
Pluggable Devices ..... 44
Authentication ..... 44
Users ..... 45
Events_and_Logs ..... 45
Power Management ..... 46
Active Sessions Information ..... 47
**Appendices ..... 49**
Enabling Firmware Upgrades When the Boot Image is not in Flash ..... 49
Migration CLI ..... 51
Access rights ..... 51
Exceptions ..... 51
Su and Sudo Commands ..... 55
Su command ..... 55
Sudo command ..... 56
Technical Support ..... 59

# Introduction, Navigation and Commands

The Avocent® ACS 6000 advanced console server is a 1U appliance that serves as a single point for access and administration of connected devices, such as target device consoles, modems and power devices. Console servers support secure remote data center management and out-of-band management of IT assets from any location worldwide.

On console servers, administration can be performed and connected devices can be accessed with the Command Line Interface (CLI) utility, with the web manager or with DSView™ 4 management software. Multiple users and administrators can be logged into the console server and connected to ports at the same time.

**NOTE:** All instances of DSView software in this document refer to DSView software version 4 or higher.

This guide describes how to access and navigate the CLI utility and how to use it after the console server has been installed and assigned an IP address. For information on how to install or operate your console server using the web manager, see the Avocent ACS 6000 Installation/Administration/User Guide.

The console ports of servers, external modems or power distribution units (PDUs) can be connected to serial ports on the console server. Supported PDUs include Avocent PM1000/2000/3000s, Emerson Network Power MPH2 PDUs and RPC2 cards, Cyclades™ PM IPDUs, Avocent SPC power devices and Server Technology CDUs. Either a PDU or an external modem can be connected to the AUX/Modem port if the port is not factory-configured for an internal modem.

Console server ports are shown in the following figure.

**Console Server Ports**

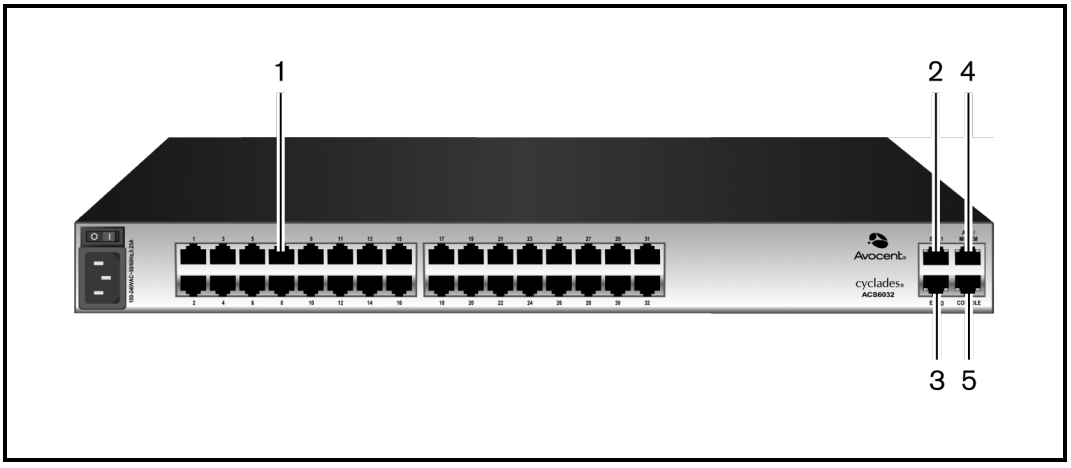

**Console Server Port Descriptions**

| Number | Description |
|---|---|
| 1 | Serial Port 1.<br>Serial ports are also referred to with tty device names, such as ttSy1, ttyS2 and so forth. |
| 2 | Eth1 (eth1) |
| 3 | Eth0 (eth0) |
| 4 | AUX/Modem Port (ttyM1 or ttyA1).<br>If an internal modem is ordered and factory installed, this port is configured internally as a modem port. If an internal modem is not installed, the port is configured as an auxiliary port, and a PDU or an external modem can be connected to it. The figure shows an external modem connected. |
| 5 | Console Port |

# Access Options and How to Log Into the CLI

The CLI utility can be accessed in the following ways:

- Through a local terminal or a computer that has a terminal emulation program connected to the console port of the console server with session settings of 9600, 8, N and 1, with no flow control.
- After the console server is connected to the network and has an IP address, it can be accessed by one of the following methods:
  - An SSH or Telnet client on a remote computer (if the SSH or Telnet protocol is enabled in the selected Security Profile)
  - With the *Web Manager - Overview - Appliance Session* button
  - With DSView management software

**NOTE:** For details on the remote access methods and IP address configuration options, see the Avocent ACS 6000 Installation/Administration/User Guide.

Administrators have full access to the CLI and to connected devices. An administrator can authorize regular users to access ports, manage power, manage data buffer storage and use one or more console server administration tools. Users can always change their own passwords.

**To start the CLI:**

1. Access the CLI through the console port, with Telnet, SSH or through the web manager.
2. Enter the username and password at the prompt. The cli-> prompt appears.

```
Welcome to ACS6000 <host name>.
Type help for more information


--:- / cli->
```

**NOTE:** The default password for admin is **avocent** and for root is **linux**. The password for these users may have been changed during installation of the console server. If not, change the default root and admin passwords to avoid potential security breaches.

## Configuration Tasks Performed With the CLI

**NOTE:** This manual provides some configuration procedures as examples of how to use the CLI; an administrator who wants to use the CLI for configuration should reference the installation/administration/user guide for more information.

The navigation structure of the CLI mirrors that of the web manager. Options and parameters are also the same, except that spaces in web manager options and parameters are replaced with underscores (_), as in: system_tools. Examples that show how to select an option in the web manager use a dash surrounded by two spaces ( - ). In the CLI, two similar options in a path are separated by a forward slash (/).

For example, in the web manager, user configuration is done when an administrator selects - *Users* - *Local Accounts* - *User Names* to get to the User Names screen. To navigate to the equivalent configuration level in the CLI, an administrator would use the cd command followed by the path: **cd /users/local_accounts/user_names**.

Administrators should log into the CLI in one window and log into the web manager in another window to see how the menu options in the web manager map to the navigation options in the CLI. Configuration with the CLI also requires mastery of the following information on CLI navigation and of the CLI commands shown in Chapter 2.

## CLI Navigation

The CLI navigation options are in a nested tree configuration.

**NOTE:** When a command line is shown in an example, and the step starts with “Enter,” or when a syntax example is given, the user should type the command as shown and then press **Enter**. The **Enter** key is not shown in command line examples unless needed for clarity.

When a user logs in the CLI, the prompt indicates the user is at the / level.

```
--:- / cli->
```

No parameters can be set at this level of the navigation tree.

At any CLI prompt at any level, if you type **cd** and press **Tab Tab**, the navigation options (path elements) for that level are listed. Different options appear for administrators and for authorized users.

- When an administrator types the **cd** command and then presses **Tab Tab** at the / prompt, the following navigation options (path elements) appear.

```
--:- / cli-> cd<Tab><Tab>
```

| | | |
|---|---|---|
| access/ | monitoring/ | system/ |
| active_sessions/ | network/ | |
| system_tools/ | | |
| authentication/ | pluggable_devices/ | users/ |
| change_password/ | ports/ | |
| events_and_logs/ | power_management/ | |

When a regular user types the **cd** command and then presses **Tab Tab** at the / prompt, the following navigation options appear.

```
--:- / cli-> cd<Tab><Tab>
access/ power_management/
```

Enter **cd** <one_or_more_path_elements> to move down one or more levels of the navigation tree:

```
--:- / cli-> cd system_tools
```

A prompt like the following appears at each level:

```
--:- system_tools cli->
```

**NOTE:** CLI commands are case sensitive.

At any level, you can press **Tab Tab** at the prompt to see the commands that can be entered at the current level.

```
---:- system_tools cli-><Tab><Tab>
batch_mode ls scp
cd opiepasswd shell
commit passwd show
echo pwd shutdown
exit quit upgrade_firmware
ftp reboot whoami
help restore_configuration wiz
hostname revert
list_configuration save_configuration
```

```
---:- system_tools cli->
```

If you know the path, you can enter multiple path elements in a single command separated with forward slashes (/).

```
--:- / cli-> cd ports/serial_ports/
--:- serial ports cli->
```

Enter **cd ..** to move up one level of the navigation tree. Enter **cd ../..**[**/..**] to move up multiple levels.

```
--:- serial ports cli-> cd ../..
--:- / cli->
```

# Autocompletion

Autocompletion allows you to type the first few letters of a command or navigation option and then press **Tab**. The rest of the name is filled in automatically if the letters typed are unique to one command or to a navigation option at that level. If the letters match more than one of the commands or navigation options for that level, the matching options are listed.

For example, if you type **cd acc** and press **Tab** at the CLI prompt from the / level, the access option will be completed.

```
--:- / cli-> cd acc<Tab>
--:- / cli-> cd access
```

If you then press **Enter**, you are changed to the access level, and the access level prompt appears.

```
--:- access cli->
```

The following example illustrates a case when more than one command matches the letters typed.

```
--:- / cli-> sh<Tab>
shell show
```

# Parameters

Some CLI commands take parameters. If you press **Tab Tab** after a command that requires a parameter, you are prompted to enter the parameter.

# Command Line Syntax

**NOTE:** Square brackets ([ ]) denote an optional element. Each element is separated by a space. There are no spaces between sub-elements.

Command only (help, pwd):

```
--:- <current_level> cli-> <command>
```

Commands with paths only (cd, ls, add):

```
--:- <current_level> cli-> <command> [Path]
```

Commands with targets (del):

```
--:- <current_level> cli-> <command> [Path] <Targets>
```

Commands that require parameters (set):

```
--:- <current_level> cli-> <command> [Path] <Params>
```

Commands with values only (sendmsg, ftp...):

```
--:- <current_level> cli-> <command> [Path] <Values>
where:
Path := path_elem[/path_elem]*
path_elem := . | .. | Section_Label | ^/
Targets := Row_Label(,Row_Label)
Params := Param_Names=PValues
Param_Names := Param_Label(:Param_Label)*
PValues := Value_text(,Value_text)*
Values := Value_text Value_text
Section_Label
Param_Label
Value_text := labels or data from the UIC.
```

Syntax used:

```
^ : beginning of the element
* : 0 - many
| : or
() : group
```

# CLI Command Set

## Commands Used for the CLI

This chapter describes the general commands used when accessing the console server with the command line interface.

**NOTE:** Most of the commands work from any location when the path to the command parameter is included.

**NOTE:** The word “node” refers to an entity such as a route, host or user, which can be added, configured or deleted.

## help

Generate a help message about how to navigate the CLI.

Syntax:

```
--:- / cli-> help
- Thank you for using the cli -

This interface allows you to easily modify configurations
to customize and define the functionality of your unit.

Press <tab> <tab> to see the list of available commands.

Please refer to the Reference Guide for a description of
commands, special keys and additional information on how to
use this interface.

Some basic and useful keys are:
up/down arrow - navigates up/down in the command history
tab (once/twice) - shows the next possible option(s)

Other hints:
Use backslash '\' to escape spaces, '\' and other control
characters when assigning values to parameters.
```

# add

Add a node.

Syntax:

```
--:- / cli-> add <Path>
Example:
--:- / cli-> add network/hosts
--:#- [hosts] cli->
```

# delete

Delete a node.

Syntax:

```
--:- / cli-> delete <Path> <parameter>
```

# cd

Change directory (level).

Syntax:

```
--:- / cli-> cd <Path>
```

Example:

```
--:- / cli-> cd access
```

Displays the following:

```
--:- access cli->
```

Example:

```
--:- access cli-> cd ..
-or-
--:- access cli-> cd ../
```

Moves up one directory level and displays the following:

```
--:- / cli->
```

Example:

```
--:- access cli-> cd /
```

Moves to the top level and displays the following:

```
--:- / cli->
```

Example:

```
--:- access cli-> cd /information
```

Displays the following:

```
--:- information cli->
```

## pwd

Display the path to the current level (print working directory).

Syntax:

```
--:- / cli-> pwd
```

## connect

Connect to a serial port.

Syntax:

```
--:- access cli-> connect <port_name>
```

Example:

```
--:- access cli-> connect 77-77-70-p-2
```

-or-

(Optional) From the default directory:

```
--:- / cli-> connect access/77-77-70-p-2
```

Displays the following:

```
Password:
```

-or-

Type the hotkey to suspend the connection:

**Ctrl + z**

**NOTE:** The connect, sniff and share commands allow you to connect to serial ports. These commands require authentication when single sign-on is disabled, so the password must be entered to authenticate the user in the authentication type configured for the serial port. If single sign-on is enabled or the user has already been authenticated, the session is opened.

## sniff

Connect to a serial port as an additional, view-only user.

Syntax:

```
--:- access cli-> sniff <port_name>
```

Example:

```
--:- access cli-> sniff 77-77-70-p-2
```

Displays the following:

```
Password:
```

-or-

Type the hotkey to suspend the connection:

**Ctrl + z**

## share

Connect to a serial port as an additional, read/write user.

Syntax:

```
--:- access cli-> share <port_name>
```

Example:

```
--:- access cli-> share 77-77-70-p-2
```

Displays the following:

```
Password:
```

-or-

Type the hotkey to suspend the connection:

**Ctrl + z**

# disconnect

Use the text session hot key to suspend the target session and return to the CLI.

Syntax:

**Ctrl+z**

# exit/quit

Exit the CLI and return to the login prompt.

Syntax:

```
--:- / cli-> exit
```

-or-

```
--:- / cli-> quit
```

# ftp

Connect to a remote FTP server.

Syntax:

```
--:- / cli-> ftp [<server_IP_address>|<hostname>]
```

**NOTE:** You must log into the CLI as root to have full control over the local directory path. All normal FTP commands apply.

# scp

Perform a secure shell copy.

Syntax:

```
--:- / cli-> scp [[user@]host1:]file1 [...] [[user@]host2:]file2
```

# set

Set a parameter.

Syntax:

```
--:- / cli-> set <Path> <Parameter>=<Value>
```

After a parameter has been changed using the set command, a pair of asterisks appear at the beginning of the CLI prompt.

```
**:- / cli->
```

Save the change:

```
**:- / cli-> commit
```

-or-

Undo the change:

```
**:- / cli-> revert
```

**NOTE:** After a commit or revert command, the asterisks at the beginning of the CLI prompt are replaced by hyphens. Asterisks will not appear after the execution of the set command if using wizard mode, which can be recognized by a prompt that has a pound sign after the colon and the current directory in square brackets (example, --:#- [hosts] cli->).

# commit

Save settings.

Syntax:

```
**:- settings cli-> commit
```

# revert

Undo a previous parameter setting.

Syntax:

```
**:- / cli-> revert
```

# ls

Show the available directories or subnodes at the current location.

Syntax:

```
--:- / cli-> ls
```

Example:

```
--:- / cli-> ls authentication
appliance_authentication/
authentication_servers/
--:- / cli->
```

# show

Show the content of the current location (shows tables and parameters with current values).

Syntax:

```
--:- / cli-> show
```

Example:

```
--:- language cli-> show
appliance_languate = english
--:- / cli->
```

# list_configuration

List the configuration in a format that allows pasting the output directly on the appliance session (console, SSH or Telnet) in order to (re)configure the unit.

All configurable parameters are listed under the current node. When the parameter is not configured, the parameter name has the number sign character (#) as its prefix.

Syntax:

```
--:- / cli-> list_configuration
```

Example:

```
.list configuration of network device eth0:
--:- cli-> cd network/devices/eth0
```

```
--:- eth0 cli-> list_configuration
echo off
cd /network/devices/eth0
batch_mode
set status=enabled
set ipv4_method=dhcp
#set ipv4_method=static #ipv4_address=192.168.160.10 #ipv4_mask=255.255.255.0
#set ipv4_method=ipv4_address_unconfigured
#set ipv6_method=stateless
#set ipv6_method=dhcpv6
#set ipv6_method=static #ipv6_address= #ipv6_prefix_length=
set ipv6_method=ipv6_address_unconfigured
set mode=auto
submit
echo on
commit
--:- eth0 cli->
```

**NOTE:** Check the configuration of the program used to open a session against the appliance (SSH/Telnet, TeraTerm / HypertTerminal for console, and so on) to avoid the inclusion of a line feed character in lines that exceed terminal width, because this will affect the past operation.

## cycle, on, off, lock and unlock

Control power on outlets on a PDU that is either connected to a serial port or to the AUX/Modem port when the port is enabled and configured with the Power Profile.

**NOTE:** Lock and unlock commands are only supported on Cyclades and Avocent PDUs.

**To power control (on, off, cycle) all outlets of PDUs or outlets merged to a target (serial port configured as CAS profile with merged outlets):**

1. Go to the access level.

   ```
   --:- / cli-> cd/access
   ```

2. Launch the power command with the argument being the target name or PDU ID.

   ```
   --:- access cli-> [cycle|on|off][<PDU_ID>]|<target name>]
   ```

**To power control (on, off, cycle) outlets of one specific PDU:**

1. Go to the PDU level under access.

```
--:- / cli-> cd access/<PDU_ID>
```

2. Launch the power command with a specific outlet (number or name), range of outlets (use a hyphen to specify the range) or list of outlets (number or name separated by a comma).

```
--:- <PDU_ID> cli-> [cycle|on|off][<outlet name>|<outlet number>]
```

-or-

```
--:- <PDU_ID> cli-> [cycle|on|off]<outlet number>-<outlet number]
```

-or-

```
--:- <PDU_ID> cli-> [cycle|on|off]<outlet number>,<outlet number>
```

**To power control (on, off, cycle, lock, unlock) outlets of one specific PDU under the power management level:**

1. Go to the outlet level for the specific PDU.

```
--:- / cli-> cd power_management/pdus/<PDU_ID>/outlets
```

2. Launch the power command with a specific outlet number, range of outlets (use a hyphen to specify the range) or list of outlets (number or name separated by a comma).

```
--:- outlets cli-> [cycle|on|off] [<outlet number>]
```

-or-

```
--:- outlets cli-> [cycle|on|off] <outlet number>-<outlet number]
```

-or-

```
--:- outlets cli-> [cycle|on|off] <outlet number>,<outlet number>
```

# passwd

Configure the password for the current user. The terminal does not echo the password.

Syntax:

```
--:- / cli-> passwd
```

# opiepasswd

Configure a one time password (OTP) for the local user. After you type the command, you will be asked for the pass phrase to use for the OTP.

**NOTE:** Use this command to restart the sequence number.

Syntax:

```
--:- / cli-> opiepasswd -f -c <username>
```

Example:

```
opiepasswd -f -c teste
Adding teste:
Only use this method from the console; NEVER from remote. If you are using telnet, xterm, or a dial-in, type ^C now or exit with no password.
Then run opiepasswd without the -c parameter.
Using MD5 to compute responses.
Enter new secret pass phrase:
Again new secret pass phrase:

ID teste OTP key is 499 AC0241
FOOD HUGH SKI ALMA LURK BRAD
```

## wiz

Configures the IP parameters for the Eth0 interface. Shows the current configuration and asks for new values for the following parameters:

- Status of the interface (enabled or disabled)
- IPv4 method (dhcp or static)
- IPv6 method (dhcp or static)
- IP address, mask and gateway (if static is chosen for either of the previous parameters)
- DNS Primary Server, Secondary Server, Domain Name and Hostname
- Enable or disable IPv6 support

After setting all parameters, confirm that all parameters are correct to save them.

# Special Multi-session Commands

The following commands require navigation to an enabled and configured port to which one or more users are simultaneously connected. To get to the port, enter the following command.

```
--:- / cli-> cd access/<serial_port_ID>
```

# list_shared_session

List the users connected to the shared serial port.

Syntax:

```
--:- <serial_port_ID> cli-> list_shared_session
```

# kill_shared_session

Terminate the connection of a user on the port. The user is returned to the cli-> prompt.

Syntax:

```
--:- <serial_port_ID> cli-> kill_shared_session <username>
```

Example:

```
--:- <serial_port_ID> cli-> kill_shared_session admin@139
```

# sendmsg

Send a message to a user connected to the port.

Syntax:

```
--:- <serial_port_ID> cli-> sendmsg <username> <message>
```

Example:

```
--:- <serial_port_ID> cli-> sendmsg admin@139 You are being terminated.
```

# show_databuf and show_appliance_databuf

View the data buffer files for the port. Data buffering must be enabled in the CAS Profile for the port and the user must be authorized for data buffer management.

Syntax:

```
--:- <serial_port_ID> cli-> show_databuf
```

View the data logging for the appliance. Appliance Session Data logging must be enabled in Events and Logs/Appliance Logging

Syntax:

```
--:- / cli -> show_appliance_databuf
```

The following commands are available for show data buffering:

- **Return** - Scroll forward one line.
- **Ctrl + F** - Scroll forward one window.
- **Ctrl + B** - Scroll backward one window.
- **/pattern** - Search foward in the file for the first line containing the pattern.
- **?pattern** - Search backward in the file for the first line containing the pattern.
- **n** - Repeat the search.
- **q** - Quit.

## cleandbuf and clean_appliance_databuf

Clear the data buffer. Data buffering must be enabled in the CAS Profile or the port and the user must be authorized for data buffer management.

Syntax:

```
--:- <serial_port_ID> cli-> cleandbuf
```

Clear the data logging for the appliance. Appliance Session Data logging must be enabled in Events and Logs/Appliance Logging

Syntax:

```
--:- / cli -> clean_appliance_dbuf
```

## CLI Equivalent Actions to Web Manager Checkbox Selection

**NOTE:** The following example procedure, which configures IPv6, illustrates the actions to use in the CLI to enable or disable an option when a checkbox would be selected or deselected in the web manager. The sub-parameters will be available after the option is enabled.

**To configure IPv6 (example of how to perform the equivalent of web manager checkbox selection/deselection):**

1. Log into the CLI and enter **cd network/settings.**

```
--:- / cli-> cd network/settings
```

2. Enter **show** to view the status of IPv6 configuration.

```
--:- settings cli-> show
hostname = ACS6048
primary_dns = 110.126.129.4
secondary_dns =
domain = corp.tst.com
enable_ipv6 = no
enable_bonding = no
enable_ipv4_multiple_routing_tables = no
```

3. Type **set enable_ipv6=** and press **Tab** to view the options for the parameter.

```
--:- ipv6 cli-> set enable_ipv6=<Tab>
no yes
```

4. Enter **set enable_ipv6=no** to disable IPv6.

```
--:- ipv6 cli-> set enable_ipv6=no
```

-or-

Enter **set enable_ipv6=yes** to enable IPv6.

--:- ipv6 cli-> **set enable_ipv6=yes**

5. (Optional) Enter either of the following commands to enable subparameters.

```
**:- ipv6 cli-> set get_dns_from_dhcpv6=yes
**:- ipv6 cli-> set get_domain_from_dhcpv6=yes
```

6. Enter **show** to verify the change.

```
**:- settings cli-> show
hostname = ACS6048
primary_dns = 110.126.129.4
secondary_dns =
domain = corp.tst.com
enable_ipv6 = yes
get_dns_from_dhcpv6 = no
get_domain_from_dhcpv6 = no
enable_bonding = no
```

7. Enter **commit**.

# Port Access and Configuration Examples

By default, all serial ports and the AUX/Modem port are disabled. An administrator must enable and configure the ports before anyone can use them. Configuration of ports differs based on the type of connected device, which can be either a device console, a PDU or modem.

By default, all users can access all enabled and configured ports. The administrator must decide whether to restrict user access to ports by the assignment of authorizations to user groups. A user who is in an authorized group is referred to as an authorized user.

Some port configuration tasks are provided as examples of how to use the CLI. See the Avocent ACS 6000 Installation/Administration/User Guide for an overview of the tasks the administrator must do to configure restricted access to ports. For more information about how to follow the web manager procedures in the CLI, see *Configuration Tasks Performed With the CLI* on page 3.

This section describes the following tasks related to port access, configuration, power management and where the tasks are performed in the CLI.

**Port Access and Configuration Tasks**

| Task | Where Performed |
|---|---|
| View information about the console server and the connected devices | access show |
| Authorized users access enabled on configured ports | access connect |
| Authorized users manage power on outlets | access/<PDU_ID>/outlets -or- power_ management/PDUs/<PDU_ID>/outlet_table |
| Administrators configure ports connected to the consoles of devices | ports See Chapter 3 for all Ports options. |

## View Information About the Console Server and Connected Devices

When a regular user or an administrator enters **show** at the Access level, information about the following appears in the format shown in *Access Parameters* on page 24.

- The console server
- The AUX/Modem port (if it is enabled and configured with the Power Profile)
- The serial ports that user is authorized to access (if they are configured with the CAS or Power Profile)

### Access Parameters

| Field | Description |
|---|---|
| **For Appliance** | |
| Name | Name assigned to the appliance (for example, ACS6048-1357908642) |
| Port | N/A |
| Type | N/A |
| Status | N/A |
| **For Serial Port** | |
| Name | Either the default name [*XX-XX-XX*-p-*n* (where *n*=port_number)], an administrator-assigned alias or an auto-discovered server name |
| Port | Number of the serial port |
| Type | Serial |
| Status | Idle / In-Use |
| **For Power** | |
| Name | PDU ID (either the default name in the format *XX-XX-XX*P*XX_n* or an administrator-assigned alias, such as myPDU) |
| Port | Number of the serial port/position on the chain |
| Type | PDU model |
| Status | Number of Outlets ON \| Total outlets |
| **For Outlets** | Enter **cd** <PDU_ID>/outlets and enter **show** to see list of outlets and the actions that can be taken (commands that can be executed) for each outlet as shown below. |
| Name | Either the default *XX-XX-XX*P*XX_n_n* or an administrator-assigned name |
| Port | PDU outlet number |
| Type | Outlet |
| Status | ON / OFF |
| Action | None |

### To view information about the console server and connected devices:

1. Log into the CLI and enter **cd access** to change to the Access level.

```
--:- / cli-> cd access
```

2. Enter **show**. Information about the console server and the ports the current user is authorized to access appears.

```
--:- access cli-> show
Name Port Type Status
==========================================
ACS6016-0011223344
21-67-72-p-1 1 serial in-use
21-67-72-p-2 2 serial idle
21-67-72-p-4 4 serial idle
myPDU 3|1 PM8|15A 8|8
Type ls to see available sub-nodes
```

```
--:- access cli->ls
ACS6016-0011223344/
21-67-72-p-1/
21-67-72-p-2/
21-67-72-p-4/
myPDU/

Type show to see the content of the page

--:- access cli->
```

# Connect to a Device Console Connected to a Serial Port

The following procedure is an example of how an administrator or an authorized user can connect to a device console when the device is connected to a port that is enabled and configured with the CAS Profile.

**To connect to a device console connected to a serial port:**

**NOTE:** The serial port must already be configured and enabled prior to this procedure. See *Port Configuration Examples* on page 27.

1. Log into the CLI and enter **cd access** to navigate to the Access level.

```
--:- / cli-> cd access
--:- access cli->
```

2. Enter **connect** <serial_port_name>. If authentication is configured for the port, the Password prompt appears when single sign-on is disabled.

```
--:- access cli-> connect 77-77-70-p-2
password:
```

**NOTE:** The connect command above shows a connection to a port that has an alias of 77-77-70-p-2.

3. If prompted, enter the password for the port. The following prompt appears.

```
Type the hot key to suspend the connection: <CTRL>z
```

4. Press **Enter** to continue. You are connected to the device that is connected to the port. The window shows the initial display for the device (usually a console banner and login prompt). An example is shown below.

```
Ubuntu 6.06.1 LTS fremont-techpubs ttyS2
```

```
fremont-techpubs login: fred
Password:
Last login: Tue Oct 2 13:09:04 2007 on :0
Linux fremont-techpubs 2.6.15-28-386 #1 PREEMPT Wed Jul 18 22:50:32 UTC 2007 i68
6 GNU/Linux
#
```

# Accessing Serial Ports using ts_menu

The ts_menu is an application to facilitate connection to the serial ports. It displays a menu showing the server names connected to the serial ports of the console server. You must configure the login profile for the group that the users belong to as ts_menu.

## ts_menu options

### -u <user> [-l] [-ro] <console port>

**ts_menu Parameters**

| Parameter | Description |
|---|---|
| `-u <user>` | Invokes ts_menu as the user named by <user>. This requires a password to be entered. The user only has access to authorized serial ports. |
| `-l` | Generates a list of ports the user can access. Port aliases are shown if defined. |
| `-ro` | Invokes ts_menu in read-only mode. You may connect in read-only mode to any port you have access to. |
| `<console port>` | If issued, produces a direct connection to that port. If you have no access rights to the port or if the port does not exist, the application returns a console not found message and terminates. The console port may be the port alias or the port number. |
| `-p` | Display TCP port. |
| `-i` | Display Local IP assigned to the serial port. |
| `-u <name>` | Username to be used in SSH/Telnet or Raw command. |
| `-e <[^]char>` | Escape character used to close the target session. The default escape character is **Ctrl-X.** |

**To close the target session:**

1. Enter the escape character shown when you connect to the port.
2. The menu with ports is displayed.
3. Select the exit option to return to the shell prompt.

# Manage Power for a Device Connected to an Outlet on a PDU

See *cycle, on, off, lock and unlock* on page 16 for how an authorized user can manage power on PDU outlets when the PDU is connected to an enabled port configured with the Power Profile and the PDU is connected to the network and added to the appliance as Network PDU.

# Port Configuration Examples

The following examples show how an administrator can configure a port when a device console is connected, assign the CAS profile, configure a port that is connected to a PDU and assign the Power Profile.

**To set up a console access service (CAS) port:**

1. Log onto the CLI as an administrator.

```
--:- / cli->
```

2. Enter **set_cas ports/serial_ports/** followed by a space and the number of the port you want to configure (port 1 is used as an example).

```
--:- / cli-> set_cas ports/serial_ports/ 1
```

3. Enter **show** to view the status of port 1.

```
Selected items: 1
Port: 1
enable_cisco_rj45_pin-out = no
status = enabled
speed = 9600
parity = none
data_bits = 8
stop_bits = 1
flow_control = none

Type ls to see available sub-nodes.
--:#- [serial_ports/physical] cli->ls
cas/
data_buffering/
alerts/
power/

Type show to see the content of the page.
```

```
--:#- [serial_ports/physical] cli->
```

4. Enter **set status=enabled**, then enter **show** and **save** as shown to enable the configured port and verify and save the configuration.

```
--:- serial_ports/physical cli-> set status=enabled
--:- serial_ports/physical cli-> show
--:- serial_ports/physical cli-> save
```

**To enable a power management port:**

1. Log onto the CLI as an administrator and enter **set_power ports/serial_ports/** <port number> to select a port with a PDU connected (port 3 is used as an example).

```
--:- / cli-> set_power ports/serial_ports/ 3
```

2. Enter **show** to view the configuration of port 3.

```
--:- serial_ports/physical cli-> show
Selected items: 3
Port: 3
enable_cisco_rj45_pin-out = no
status = enabled
speed = 9600
parity = none
data_bits = 8
stop_bits = 1
flow_control = none

Type ls to see available sub-nodes

--:- serial_ports/physical cli->
```

3. Enter **set status=enabled** then enter **save** to set the Serial_Profile to Power, enable the port and commit the changes.
4. Enter **show** to verify the configuration.

```
--:- serial_ports cli-> show

Port Device Name Profile Settings
==== ====== ================= ======= ========================
1 ttys1 ACS6016-0088664422 cas 9600_8N1_telnet-ssh_local
2 ttys2 21-67-72-p-2 cas 9600_8N1_telnet-ssh_local
3 ttys3 power cas 9600_8N1_telnet-ssh_local
```

```
4 ttys4 21-67-72-p-4 cas 9600_8N1_telnet-ssh_local
5 ttys5 21-67-72-p-5 cas 9600_8N1_telnet-ssh_local
6 ttys6 21-67-72-p-6 cas 9600_8N1_telnet-ssh_local
7 ttys7 21-67-72-p-7 cas 9600_8N1_telnet-ssh_local
8 ttys8 21-67-72-p-8 cas 9600_8N1_telnet-ssh_local
9 ttys9 21-67-72-p-9 cas 9600_8N1_telnet-ssh_local
10 ttys10 21-67-72-p-10 cas 9600_8N1_telnet-ssh_local
11 ttys11 21-67-72-p-11 cas 9600_8N1_telnet-ssh_local
12 ttys12 21-67-72-p-12 cas 9600_8N1_telnet-ssh_local
13 ttys13 21-67-72-p-13 cas 9600_8N1_telnet-ssh_local
14 ttys14 21-67-72-p-14 cas 9600_8N1_telnet-ssh_local
15 ttys15 21-67-72-p-15 cas 9600_8N1_telnet-ssh_local
16 ttys16 dial-in 38400

Type ls to see available sub-nodes
```

# CLI Overview for Administrators

This chapter describes using the Command Line Interface (CLI) for administrators. Only administrators and authorized users can access the commands listed in this chapter. These procedures assume you have logged into the CLI as an administrator and are at the --:- / cli-> prompt.

**NOTE:** In the tables that show output from the **show** command, when an option that is followed by an equal sign (=) is left blank, that option is not assigned a value by default.

## System

1. Enter **cd system** to navigate to the System level.

```
--:- / cli-> cd system
```

2. Enter **ls** to view the available options.

```
--:- system cli-> ls

security/
date_and_time/
help_and_language/
general/
boot_configuration/
information/
usage/
```

3. Enter **show** followed by an option name to view information about each option.

```
--:- security cli-> show security_profile
```

## System/Security

Enter **cd security** to navigate to the security level.

```
--:- / cli-> cd system/security
```

**System/Security Options**

| System Navigation Tree |
| --- |
| security_profile |

| System Navigation Tree | | |
|---|---|---|
| | idle_timeout = | |
| | rpc = | |
| | port access = | |
| | session = | |
| | port_access_kill_multi_session = | |
| | port_access_send_message_multi_session = | |
| | port_access_power_control = | |
| | port_access_data_buffer_management = c | |
| | bootp_enabled= | |
| | | bootp_interface= |
| | | enable_live_configuration_retrieval= |
| | port_acess_per_user_group_authorization = | |
| | ssh_allows_authentication_via_username\|password = | |
| | security_profile= | |
| | | enable_telnet_service= |
| | | enable_ftp_service= d |
| | | enable_snmp_service= |
| | | enable_ipsec= |
| | | answer_icmp_message= |
| | | ssh_version= |
| | | ssh_tcp_port= |
| | | ssh_allow_root_access= |
| | | ssh_minimum_cipher_and_mac_suite_level = |
| | | enable_http_session= |
| | | http_port= |
| | | enable_https_session |
| | | https_ssl_version= |
| | | https_port= |
| | | https_minimum_cipher_suite_level= |
| | | redirect_http\|https= |
| dsview | | |
| | all_appliance_to_be_managed_by_dsview= | |
| fips_140 | | |
| | enable_fips_140-2_module= | |

# System/Date and Time

Enter **cd system/date_and_time** to navigate to the date_and_time level.

```
--:- / cli-> cd system/date_and_time
```

**Date and Time Options**

| Date and Time Navigation Tree | | | |
|---|---|---|---|
| date_and_time | | | |
| | date_and_time | | |
| | | settings= | |
| | | | day= |
| | | | hour= |
| | | | minute= |
| | | | month= |
| | | | second= |
| | | | year= |
| time_zone= | | | |

# System/Help and Language

Enter **cd system/help_and_language** to navigate to the online_help level.

```
--:- / cli-> cd system/help_and_language
```

**To set the online help URL:**

Perform this procedure if you have downloaded the online help files to a web server that is accessible to the console server.

1. Enter the following command.

   ```
   --:- / cli> cd system/help_and_language/
   ```

2. Enter the following command.

   ```
   --:- help_and_language cli> set url=<online_help_location>
   ```

   A line similar to the following appears.

   ```
   **:- help_and_language cli>
   ```

3. Save your settings.

   ```
   **:- help_and_language cli> commit.
   ```

**Help and Language Options**

| Help and Language Navigation Tree |
|---|
| appliance_language= |
| url= |

# System/General

Enter **cd system/general** to navigate to the login_banner level.

```
--:- / cli-> cd system/general
```

**To set the login banner:**

1. Enter the following command.

```
--:- / cli> cd system/general/
```

2. Enter the following command.

```
--:- general cli-> set enable_login_banner=yes
**:- general cli> set login_banner=<login banner text>
```

**NOTE:** <login banner text> with new lines: Type the text between double quotes and enter the new line as \\n (double back slash and the character).

A line similar to the following appears.

```
**:- general cli>
```

3. Save your settings.

```
**:- general cli> commit.
```

# System/Boot Configuration

Enter **cd system/boot_configuration** to navigate to the boot_configuration level.

```
--:- / cli-> cd system/boot_configuration
```

**System/Boot Configuration Options**

| Boot Configuration Navigation Tree | |
|---|---|
| boot mode= | |
| console_speed= | |
| eth0_mode= | |
| eth1_mode= | |
| watchdog_timer= | |
| boot_mode=flash | |
| | image=image |

# System/Information

1. Enter **cd system/information** to navigate to the Information level.

```
--:- / cli> cd system/information/
```

2. Enter **show** to view the system information.

# System/Usage

Enter **cd system/usage** to navigate to the Usage level.

```
--:- / cli> cd system/usage/
```

**System/Usage Options**

| Usage Navigation Tree |
|---|
| flash usage |
| memory |

# Network

1. Enter cd network to navigate to the Network level

   ```
   --:- / cli-> cd network/
   ```

2. Enter **ls** to view the list of available options.

   ```
   settings/
   devices/
   ipv4_static_routes/
   ipv6_static_routes/
   hosts/
   firewall/
   ipsec(vpn)/
   snmp/
   ```

# Network/Settings

1. Enter **cd network/settings** to navigate to the Network settings level.

   ```
   --:- / cli-> cd network/settings/
   ```

2. Enter **show** to view the list of available options.

**Network Options**

| Network Navigation Tree | |
|---|---|
| settings | |
| | domain= |
| | enable_bonding= |
| | enable_ipv6= |
| | hostname= |

| Network Navigation Tree | | |
|---|---|---|
| | primary_dns= | |
| | secondary_dns= | |
| | enable_ipv6= | |
| | | get_dns_from_dhcpv6= |
| | | get_domain_from_dhcpv6= |
| | enable_ipv4_multiple_routing_tables= | |

# Network/IPv4 and IPv6

IPv4 addresses are always enabled. An administrator can also enable IPv6 addresses at the appliance_settings/network/ipv6 level. A procedure to enable IPv6 is used as an example in *CLI Equivalent Actions to Web Manager Checkbox Selection* on page 20.

**Network/IPv4 and IPv6 Options**

| IPv4 and IPv6 Navigation Tree | | |
|---|---|---|
| ipv4_static_routes | | |
| | default_3 | |
| | | gateway= |
| | | interface= |
| | | metric= |
| ipv6_static_routes | | |

# Network/Devices

The procedure to configure a static IP address for the primary Ethernet interface is usually performed during installation so that administrators have a fixed IP address for access to the web manager and can finish configuration.

**To configure a IPv4 or IPv6 static IP address:**

**NOTE:** This procedure configures either an IPv4 or IPv6 static IP address for the ETH0 (eth0) or the ETH1 (eth1) port. You can configure an IPv6 static IP address only if IPv6 is enabled.

1. Enter **cd network/devices/**<eth0|eth1>**/settings** to navigate to the Settings level for the desired interface.

   --:- / cli-> **cd network/devices/eth0/**

2. Enter **set ipv<4|6>_method=static** to set the method to static for IPv4 or IPv6.

   **:- eth0 cli-> **set ipv4_method=static**

3. Enter **set ipv<4|6>_address=**<IP_Address> **ipv<4|6>_mask=**<netmask> to set the IP address and subnet mask, then enter **commit** to save the change.

```
--:- eth0 cli-> set ipv4_address=172.26.31.10 ipv4_mask=255.255.255.0
**:- eth0 cli-> commit
```

4. Enter **show** to view the changes.

```
--:- eth0 cli-> show
```

**Network/Devices Options**

| Devices Navigation Tree | | |
|---|---|---|
| devices | | |
| | eth0 | |
| | | ipv4_method= |
| | | ipv6_method= |
| | | mode= |
| | | status= |
| | eth1 | |
| | | ipv4_method= |
| | | ipv_6method= |

# Network/Hosts

The following procedure describes how to add a host to the hosts table.

**To add a host to the host table:**

1. Enter **cd network/hosts** to navigate to the Hosts level.

```
--:- / cli-> cd network/hosts
```

2. Enter **show** to view the current host settings.

```
--:- hosts cli-> show
127.0.0.1
ip: 127.0.0.1
hostname: localhost
alias:
127.0.0.1/
```

3. Type **add** then press **Return**.

```
--:- hosts cli-> add<Return>
--:#- [hosts] cli-> ls
ip =
hostname =
alias =
```

```
--:#- [hosts] cli->
```

4. Enter **set hostname=**<hostname> **ip=**<IP_address> to add the name of a host and the IP address for the host.

**NOTE:** Each parameter that follows the add command is separated by a space.

```
--:#- [hosts] cli-> set hostname=sharedacs6000 ip=172.26.31.164
```

5. Enter **commit**.

```
--:#- [hosts] cli-> save
```

6. Enter **show** to verify the changes took place and to view the new host entry.

```
--:- hosts cli-> show
127.0.0.1
ip: 127.0.0.1
hostname: localhost
alias:
172.26.31.164
ip: 172.26.31.164
hostname: sharedacs6000
alias:

127.0.0.1/add
172.26.31.164/
```

7. Enter **cd <IP_address>/settings** to navigate to the level where you can perform additional configuration of the host entry.

--:- hosts cli-> **cd 172.26.31.164/settings**

8. Enter **show** to view the additions to the host table and the Settings option.

```
--:- 172.26.31.164 cli-> show
ip: 172.26.31.164
hostname = sharedacs6000
alias =
```

**Network/Hosts Options**

| Hosts Navigation Tree | | |
|---|---|---|
| hosts | | |
| | 127.0.0.1 | |
| | | alias= |
| | | hostname= |

# Network/Firewall

Enter **cd network/firewall** to navigate to the firewall level.

```
--:- / cli-> cd network/firewall
```

**NOTE:** To set a rule, you must enable the interface, set the rule for the interface and physically connect the interface to the network.

### Network/Firewall Options

| Firewall Navigation Tree | | | |
|---|---|---|---|
| firewall | | | |
| | ipv | | |
| | | ipv4_filter_table | |
| | | | FORWARD |
| | | | INPUT |
| | | | OUTPUT |
| | | ipv6_filter_table | |
| | | | FORWARD |
| | | | INPUT |
| | | | OUTPUT |

# Network/IPSec(VPN)

Enter **cd network/ipsec(vpn)** to navigate to the ipsec(vpn) level.

```
--:- / cli-> cd network/ipsec(vpn)
```

### Network/IPSec(VPN) Options

| IPSec(VPN) Navigation Tree |
|---|
| ipsec(vpn) |

# Network/SNMP

Enter **cd network/snmp** to navigate to the snmp level.

```
--:- / cli-> cd network/snmp
```

### Network/SNMP Options

| SNMP Navigation Tree | | |
|---|---|---|
| snmp | | |
| | public_v1\|v2/ | |
| | | oid= |
| | | permission= |
| | | source= |

# Wiz command

The wiz command allows administrators to easily and quickly perform the initial network configuration of the eth0.

At the command prompt at the / level, enter **wiz** to view the current IP configuration. To change the IP configuration, press **Tab** to move through the parameters, and press **Esc + Tab** to edit the selected parameter. When you are finished, enter **yes** to confirm that all parameters are correct and to save the new parameters.

```
--:- / cli-> wiz
Current IPv4 address: 172.26.30.249
Current IPv6 address:
eth0:
device_status = enabled
ipv4_method = dhcp
ipv4_address = 192.168.160.10
ipv4_mask = 255.255.255.0
ipv4_default_gateway =
ipv6_method = ipv6_address_unconfigured
ipv6_address =
ipv6_prefix_length =
ipv6_default_gateway =
MAC Address: 00:e0:86:21:67:72
dns:
primary_dns = 172.26.29.4
secondary_dns =
domain = corp.avocent.com
hostname = ACS6016-0011223344
ipv6:
```

**NOTE:** Enabling or disabling IPv6 requires a reboot to be effective.

```
enable_ipv6 = yes
get_dns_from_dhcpv6 = no
get_domain_from_dhcpv6 = no

Some basic and useful keys are:
- tab (once/twice) - shows the next possible commands/option(s)
- esc tab - gets the current parameter value for editting
```

```
Other hints:
- Use backslash '\' to escape spaces, '\' and other control
characters when assigning values to parameters.

Current IPv4 address: 172.26.30.249
Current IPv6 address:
eth0:
device_status (disabled, enabled) [enabled]:
```

# Ports

Enter **cd ports** to navigate to the Ports level.

```
--:- / cli-> cd ports
```

### Ports Options

| Ports Navigation Tree | | | |
|---|---|---|---|
| serial ports | | | |
| auxiliary ports | | | |
| | ttyA1 | | |
| cas_profile | | | |
| | auto_discovery | | |
| | | settings | |
| | | | auto_discovery_timeout_(seconds)= |
| | | | default_speed_on_auto_discovery_failure= |
| | | | probe_speed_115200= |
| | | | probe_speed_1200= |
| | | | probe_speed_19200= |
| | | | probe_speed_230400= |
| | | | probe_speed_2400= |
| | | | probe_speed_38400= |
| | | | probe_speed_4800= |
| | | | probe_speed_57600= |
| | | | probe_speed_9600= |
| | | | probe_timeout_(seconds)= |
| | pool_of_ports | | |
| | | pool_name= | |
| | | pool_telnet_port_alias= | |
| | | pool_ssh_port_alias | |
| | | pool_raw_mode_port_alias= | |
| | | pool_ipv4_alias= | |
| | | pool_ipv4_alias_interface= | |
| | | pool_ipv6_alias= | |
| | | pool_ipv6_alias_interface= | |

| Ports Navigation Tree | | |
|---|---|---|
| | | pool_members= |
| dial-in_profile | | |
| | secure_dial-in | |
| | | callback_users |
| | settings | |
| | | log_in_to_appliance= |
| | | otp_login_authentication= |
| | | ppp_connection= |
| | | ppp\|pap_authentication= |

### Serial Port Commands

| Command | Summary |
|---|---|
| set_cas | Edits the command to configure a list of serial ports with the CAS profile. Syntax: set_cas<serial port number>, <serial port number> This command has five sub-nodes: physical, cas, data_ buffering, alerts and power. |
| set_dial-in | Edits the command to configure one serial port with the Dial-In profile. Syntax: set_dial-in<serial port number> |
| set_power | Edits the command to configure a list of serial ports with the Power profile. Syntax: set_ power<serial port number>, [<serial port number>] This edit has two sub-nodes: physical and power. |
| set_dial-out | Edits the command to configure one serial port with Dial-out on demand profile. Syntax: set_dial-out <serial port number> |
| set_ socket-client | Edits the command to configure one serial port with Socket Client profile. Syntax: set_socket-client <serial port number> |
| clone_ ports | Copies the configuration from one port to a list of serial ports. Syntax: clone_ports<serial port number> |
| reset_ port_to_ factory | Resets the serial ports to factory configuration. (This is disabled for CAS profile.) Syntax: reset_ port_to_factory<serial port number>, [<serial port number>] |
| enable_ ports | Enables serial ports. Syntax: enable_ports<serial port number>, [<serial port number>] |
| disable_ ports | Disables serial ports. Syntax: disable_ports<serial port number>, [<serial port number>] |

Example of how to set a list of serial ports 2,5 and 6 with the CAS Profile and enable the status:

```
--:- serial_ports cli-> cd /ports/serial_ports
--:- serial_ports cli-> set_cas 2,5,6
--:#- [serial_ports/physical] cli-> set status=enabled
--:#- [serial_ports/physical] cli-> show
Selected items: 2|5|6
Port: 2
```

```
enable_cisco_rj45_pin-out = no
status = enabled
speed = 9600
parity = none
data_bits = 8
stop_bits = 1
flow_control = none

Type ls to see availables sub-nodes.
--:#- [serial_ports/physical] cli-> ls
cas/
data_buffering/
alerts/
power/

Type show to see the content of the page.
--:#- [serial_ports/physical] cli->save
--:- serial_ports cli->
```

To copy the configuration from serial port 5 to ports 10 and 15:

```
--:- serial_ports cli-> clone_ports 5
--:#- [serial_ports] cli-> show
Copy configuration from: 5
copy_configuration_to =
--:#- [serial_ports] cli-> set copy_configuration_to=10,15
--:#- [serial_ports] cli-> save
--:- serial_ports cli->
```

# Auxiliary ports

Enter **cd ports/auxiliary_ports** to navigate to the auxiliary ports level.

```
--:-cli-> cd /ports/auxiliary_ports/
```

If an internal modem is factory installed, the only available serial_profile option are Dial-in and Dial-out on demand. If an internal modem is not installed, either an external modem or a PDU can be connected to the port and a third serial_profile option, Power, is available.

If no internal modem is installed, the port name is ttyA1. If an internal modem is installed, the port name is ttyM1.

Enter the commands: **set_dial-in**, **set dial-out** or **set_power** to configure the auxiliary port.

**NOTE:** The set_power command will not be available when an internal modem is installed.

```
--:- / cli-> cd ports/auxiliary_ports/
--:- auxiliary_ports cli-> show
Port Device Status Profile
===== ====== ======== ============
ttyA1 ttyA1 disabled unconfigured

Type ls to see availables sub-nodes.
--:- auxiliary_ports cli->
```

# Pluggable Devices

Type the command **enable_pluggable_device_detection** to permit detection of attached pluggable devices. Type **show** to display a list of all detected pluggable devices. Type **cd_<device name>** to configure the device.

# Authentication

Enter **cd authentication** to navigate to the authentication level.

```
--:- / cli-> cd authentication
```

**NOTE:** Kerberos does not work unless the administrator copies the /etc/krb5.keytab file from the Kerberos server and overwrites the /etc/krb5.keytab file in the console server.

### Authentication Options

| Authentication Navigation Tree | |
|---|---|
| appliance_authentication | |
| authentication_servers | |
| | radius |
| | tacacs+ |
| | ldap(s)/ad |
| | kerberos |
| | nis |
| | dsview |

# Users

Enter **cd users** to navigate to the users level.

```
--:- / cli-> cd users
```

### Users Options

| Users Navigation Tree | | |
|---|---|---|
| local_accounts | | |
| | user_names | |
| | | root |
| | | admin |
| | password_rules | |
| | | password enforcement |
| | | default expiration |
| authorization | | |
| | groups | |
| | | admin |
| | | appliance-admin |
| | | user |

### To add a user and password:

1. Enter **cd users/local_accounts/user_names** to navigate to the user_names level.

   ```
   --:- / cli-> cd users/local_accounts/user_names
   ```

2. Enter **add.** Then enter **set** with the parameters all on one line separated by spaces as shown.

   ```
   --:- user_names cli-> add

   --:#- [user_name] cli-> set user_information/ user_name=fred password=smith123abc confirm_
   password=smith123abc

   --:#- [user_names] cli->
   ```

3. Enter **save**.

   ```
   --:#- [user_names] cli-> save
   ```

4. Enter **show** to verify that the new user has been added.

   ```
   --:#- [user_names] cli-> show
   ```

# Events_and_Logs

Enter **cd events_and_logs** to navigate to the events_and_logs level.

```
--:- / cli-> cd events_and_logs
```

### Events_and_Logs Options

| Events_and_Logs Navigation Tree | | |
|---|---|---|
| event list | | |
| event destinations | | |
| | syslog | |
| | snmp trap | |
| | sms | |
| | email | |
| | dsview | |
| trap_forward | | |
| data_buffering | | |
| | local_data_buffering_settings | |
| | | segment_size_(kbytes)= |
| | | spare_segments= |
| | nfs_data_buffering_settings | |
| | | nfs_server= |
| | | nfs_path= |
| | | segment_size_(kbytes)= |
| | | spare_segments= |
| | local_nfs_data_buffering_settings | |
| | | close_log_files_and_open_new_ones_at_time_(hh:mm)= |
| | syslog_data_buffering_settings | |
| | | syslog_facility= |
| sensors | | |
| | current_temperature:(deg_c, display only) | |
| | maximum_temperature_(deg_c)= | |
| | maximum_temperature_threshold_(deg_c)=(positive integer between 0 and 4) | |
| | minimum_temperature_(deg_c)= | |
| | minimum_temperature_threshold_(deg_c)=(positive integer between 0 and 4) | |

# Power Management

The Power Management Options are described in the table below.

### Power Management Options Descriptions

| Option | Description |
|---|---|
| pdus | Allows an authorized user to reboot, restore factory default settings or to rename PDU(s). Also allows the authorized user to view information about each PDU, monitor sensors, clear sensor values, set up syslogging of events related to the PDU, configure an alarm and the LED display mode, and to manage outlets on the PDU. |
| login | Lists the username and password for each type of PDU connected to the console server. |
| outlet_ groups | Lists all configured outlet groups that the current user is authorized to manage (to manage outlet groups, the user must be in a user group that is authorized to manage all the outlets in the outlet group). An administrator can configure outlet groups. |
| network_ | Allows an administrator to add, edit or delete PDUs connected to the network. These PDUs will |

| Option | Description |
|---|---|
| pdus | show up in the PDUs node when they are discovered. Only power control opearation is supported by these PDUs. |

**To rename a PDU:**

1. Log onto the CLI as an administrator and enter **cd power_management/pdus** to navigate to the pdus level.

   ```
   --:- / cli-> cd power_management/pdus
   ```

2. Type **rename** and press **Tab Tab** to expand the parameters.

   ```
   --:- pdus cli-> rename <PDU_ID> <Tab><Tab>
   ```

3. Enter **set newpdu_id=**<new_PDU_ID>.

   ```
   --:#- [pdus] cli-> set new_pdu_id=mypdu
   --:#- [pdus] save
   ```

**NOTE:** See the Avocent ACS 6000 Installation/Administration/User guide for how to perform other authorized PDU configuration options.

**To manage power for a selected outlet:**

See *cycle, on, off, lock and unlock* on page 16 for how to manage power at the power_ management level.

# Active Sessions Information

The Active Session information fields are described in the table below. An authorized user can kill an active session with the Kill command.

**Active Sessions Field Descriptions**

| Field | Description |
|---|---|
| user | Logged in user |
| client_ip | Source of the connection |
| creation_time | Time of the session creation |
| session_type | Type of session (console, http) |
| connection_type | Type of connection (cli, wmi - that is, Web Manager) |
| target_name | Target name or alias if session is an access session |
| id | Session ID |
| parent id | Parent ID if session is a subsession |

**To view and kill Active_Sessions:**

1. From the / level CLI prompt, enter **cd active_sessions**.

```
--:- / cli-> cd active_sessions
--:- active_sessions cli->
```

2. Enter **show**. Information displays as shown about all active sessions.

```
--:- active_sessions cli-> show

37
user: admin
client_ip: none
creation_time: Tue Dec 18 03:31:01 2007

session_type: console
connection_type: cli
target_name:
id: 37
parent_id:

--:- active_sessions cli->
```

3. To kill a session (if authorized), enter **kill** followed by the session number.

# Appendices

## Enabling Firmware Upgrades When the Boot Image is not in Flash

**To enable firmware upgrades when the boot image is not in Flash:**

1. Connect to the console of the console server as root.

```
Welcome to ACS6000 <host name>.
Type help for more information.
--:- / cli->
```

2. Enter **shell**. A warning appears followed by the root prompt.

```
--:- cli-> shell
WARNING: Improper use of shell commands could lead to data loss,
the deletion of important system files or other unexpected result.
Please double-check your syntax when typing shell commands.
[root@ACS6048-3131313131 ~]#
```

3. Enter **recover-flash.sh --factory_default --doformat**.

```
[root@ACS6048-3131313131 ~]# recover-flash.sh --factory_default --doformat
[root@ACS6048-3131313131 ~]#
```

   The Flash memory is formatted, and the version of firmware in memory is stored in Flash. The command prompt reappears.

4. Enter **reboot**.

```
[root@ACS6048-3131313131 ~]# reboot
```

   When the system reboot completes, the web manager supports firmware upgrades.

# Migration CLI

The Migration CLI is a tool that allows you to configure an ACS 6000 console server that is running scripts based in the ACS advanced console server. For full configuration and management commands, it is recommended you use the ACS 6000 console server's CLI.

**NOTE:** References to an ACS advanced console server in this section refer to any advanced console server other than the ACS 6000 console server.

In the ACS 6000 console server, the login profile for the user "root" goes directly to the shell prompt. This will allow the root user to run Migration CLI commands out of the ACS 6000 console server. A new group, "login-profile-shell," is created with only root as a member. To run commands based from an ACS advanced console server, a root user should type **CLI** before the command.

## Access rights

The access rights on the ACS 6000 console server are based on authorization groups. The administrator configures the serial ports the group can access. To allow you to configure access rights, the following table displays authorization groups that will be created on the ACS 6000 console server when using the Migration CLI.

**Access Rights Groups**

| Group | Members | Permissions |
|---|---|---|
| cli_mus_ ttySxx | Users who can open a second session to a serial port. | Access to a serial port in a muli-session (read/write or read only) |
| cli_power_ ttySxx | Users who have power control in a serial port. | Power control (on/off/cycle) of outlets merged to a serial port. |
| cli_access_ ttySxx | Users who can access a serial port in a single session. | Access to a serial port in a single read/write session. |
| cli_pmd_ <username> | <username> | Power control of the outlet. |

## Exceptions

This section will list all ACS advanced console server CLI commands not available in the Migration CLI for the ACS 6000 console server. For a list of available commands, see the Avocent ACS Installation/Administration/User Guide.

The following commands or values are not supported by the Migration CLI:

**Commands Not Supported by the Migration CLI**

| Command | Value or Descriptions |
|---|---|
| **administration** | |
| backupconfig loadfrom sd | N/A |

| Command | Value or Descriptions |
|---|---|
| backupconfig saveto sd | N/A |
| upgradefw checkum | N/A |
| application | |
| connect | N/A |
| pm | N/A |
| view | N/A |
| **config administration bootconf** | |
| bootype | bootp/both/ftp |
| flashtest | full/skip |
| maxevents | <number> |
| ramtest | full/quick/skip |
| **config administration notifications** | |
| addemail | N/A |
| addpager | N/A |
| addsnmptrap | N/A |
| alarm | N/A |
| delete | N/A |
| edit | N/A |
| **config application pmdconfig general** | |
| add | N/A |
| delete | N/A |
| **config application terminalmenu** | |
| add | N/A |
| delete | N/A |
| menutitle | N/A |
| **config network hostSettings** | |
| secipaddress | <nnn.nnn.nnn.nnn> |
| secsubnetmask | <nnn.nnn.nnn.nnn> |
| mtu | N/A |
| **config physicalports access** | |
| users/groups | accepts only list of usernames |
| authtype | assume local |
| termshell | <shell command> |
| logintimeout | <login timeout in seconds> |
| **config physicalports databuffering** | |
| mode | cir/lin |
| showmenu | file/fileanderase/no/noerase/yes |
| syslogsize | <record length in bytes[40-255]> |
| **config physicalports general** | |
| pmsessions | none/ssh/ssh_telnet/telnet |

| Command | Value or Descriptions |
|---|---|
| protocol | bidirectionaltelnet, consoleraw, cslip, local, rawsocket, slip, sshv1, sshv2, telnet |
| **config physicalports multiuser** | |
| users | accepts only list of users |
| sniffmode | in/inout/no/out |
| **config physicalports other** | |
| SSHexitkey | <SSH exit key> |
| banner | <login banner> |
| host | <host> |
| sttyoptions | <stty options> |
| tcpkeepalive | <number> |
| terminaltype | aixterm, att6386, linux-lat, vt100, vt320, xtermcolor, ansi, ibm3151, scoansi, vt102, vt52, at386, linux, sun, vt220, xterm |
| winems | no/yes |
| idletimeout | <number> |
| **config physicalports power management** | |
| enableIPMI | N/A |
| disableIPMI | N/A |
| key | N/A |
| server | N/A |
| **config security** | |
| addgroup/delgroup | N/A |
| **config security adduser** | |
| shell | <shell cmd but “ts_menu”> |
| comments | <comments> |
| **config security profile custom** | |
| ports auth2sport | no/yes |
| ports bidirect | no/yes |
| ports raw2sport | no/yes |
| ports ssh2sport | no/yes |
| ports telnet2sport | no/yes |
| ssh ssh_x509 | no/yes |
| config virtualport | |
| config ipmi | <all or range/list[1-numberOfPorts]> |
| **security authentication** | |
| authtype | Otp, Otp/Local |
| pppauthtype | Otp, Otp/Local |
| timeout | |
| -t<time> | Time-out in minutes |
| -T | Disable the idle time-out. Same as -t0 |
| **config security loadkey** | |
| url | N/A |
| username | N/A |

# Su and Sudo Commands

The su and sudo commands allow a user to execute commands as a different user.

## Su command

Using the su (switch user) command, a user can switch to another user account to execute commands not authorized with their normal account. If used without a username, the su command defaults to root. Only users who are members of the wheel group can execute the su command to log in as root.

**NOTE:** The wheel group is a Linux group and is included in the firmware by default.

You will be prompted for the password of the account you're trying to switch to with the su command. You will remain logged into that account until you either press **Ctrl-D** or type **exit.**

**NOTE:** The su command will open a shell session instead of the restricted shell. The user will receive the shell prompt. Improper use of shell commands could lead to data loss. Double-check your syntax when using shell commands.

Syntax:

```
su [options][-][username[arguments]]
```

The following table describes options that can be used with the su command.

**Su Command Options**

| Option | Description |
|---|---|
| -, -l, --login | Uses an environment similar to that had the user logged in directly. When **-** is used, it must be specified as the last su option. |
| -m, -p, --preserve-environment | Preserves the current environment. |

Optional arguments may be provided after the username, in which case they are supplied to the shell (/bin/sh).

**To add a member to the wheel group:**

1. Create the user using the web manager or CLI.
2. Open a session in the appliance and log in as **root**.
3. In the shell prompt, run the usermod command to add the user to the wheel group.

   ```
   # usermod -G wheel <username>
   ```

4. Run the groups command to verify.

```
# groups <username>
```

**To delete a member from the wheel group:**

1. Edit the file /etc/group.
2. Remove the username from the line with **wheel::XX:<user1>,<user2>,<user3>**.

## Sudo command

Using the sudo (superuser do) command, a user can execute a command using the privileges of another user (often root), as specified in the /etc/sudoers file. The user is authenticated using his own password, not the root password. The /etc/sudoers file logs all commands and arguments.

Syntax:

```
sudo <command>
```

### Configuring sudo

A system administrator configures the /etc/sudoers file to give groups or users access to some or all commands not authorized with their normal account. An administrator should log into the console server as a root user and edit the /etc/sudoers file by using the **/usr/sbin/visudo** command to configure sudo.

The sudoers file is composed of aliases and user specifications. When multiple entries match for a user, they are applied in order. Where there are conflicting values, the last match is used.

Since the sudoers file is parsed in a single pass, order is important. You should structure sudoers so that the Host_Alias, User_Alias, and Cmnd_Alias specifications come first, followed by any Default_Entry lines, and finally the Runas_Alias and user specifications.

An example of an /etc/sudoers file:

```
#User alias specification
User_Alias FULLTIMERS = millert, mikef, dowdy
User_Alias PARTTIMERS = bostley, jwfox, crawl

#Cmnd alias specification
Cmnd_Alias KILL = /bin/kill
Cmnd_Alias SHUTDOWN = /sbin/shutdown
Cmnd_Alias REBOOT = /sbin/reboot
Cmnd_Alias SU = /bin su

FULLTIMERS ALL = KILL, SHUTDOWN, REBOOT, SU
```

```
PARTTIMERS ALL = SHUTDOWN, REBOOT
```

In the preceding example, the users millert, mikef and dowdy can execute the kill, shutdown, reboot and su commands while the users bostley, jwfox and crawl can only shut down and reboot the console server.

# Technical Support

Our Technical Support staff is ready to assist you with any installation or operational issues you encounter with your Avocent product. If an issue should develop, follow the steps below for the fastest possible service.

**To resolve an issue:**

1. Check the pertinent section of this manual to see if the issue can be resolved by following the procedures outlined.
2. Visit www.avocent.com/support and use one of the following resources:

   Search the knowledge base or use the online service request

   -or-

   Select *Technical Support Contacts* to find the Avocent Technical Support location nearest you.

## About Emerson Network Power

Emerson Network Power, a business of Emerson (NYSE:EMR), delivers software, hardware and services that maximize availability, capacity and efficiency for data centers, healthcare and industrial facilities. A trusted industry leader in smart infrastructure technologies, Emerson Network Power provides innovative data center infrastructure management solutions that bridge the gap between IT and facility management and deliver efficiency and uncompromised availability regardless of capacity demands. Our solutions are supported globally by local Emerson Network Power service technicians. Learn more about Emerson Network Power products and services at **www.EmersonNetworkPower.com**.

590-770-501G